


REVISION HISTORY

DEVICE ORDER INFORMATION

ABSOLUTE MAXIMUM RATINGS

- (1)
- (2)

PIN CONFIGURATION

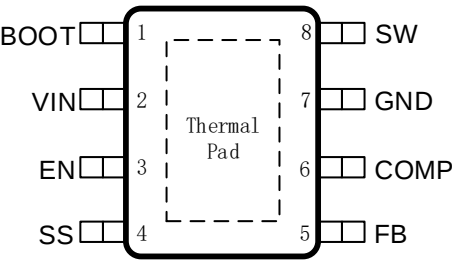

PIN FUNCTIONS

RECOMMENDED OPERATING CONDITIONS


ESD RATINGS

(1)
(2)

THERMAL INFORMATION


ELECTRICAL CHARACTERISTICS

TYPICAL CHARACTERISTICS

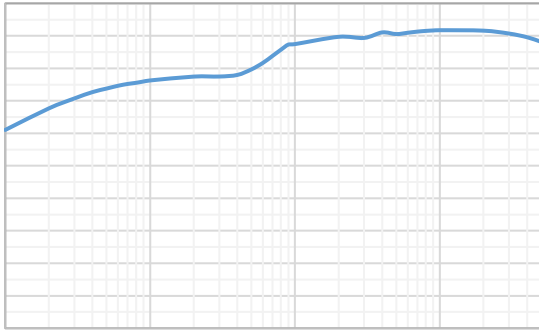

FUNCTIONAL BLOCK DIAGRAM

OPERATION

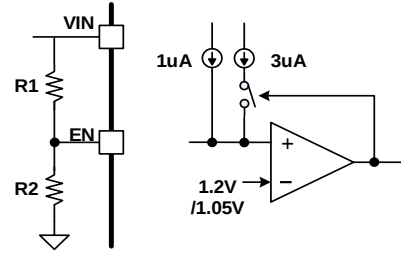













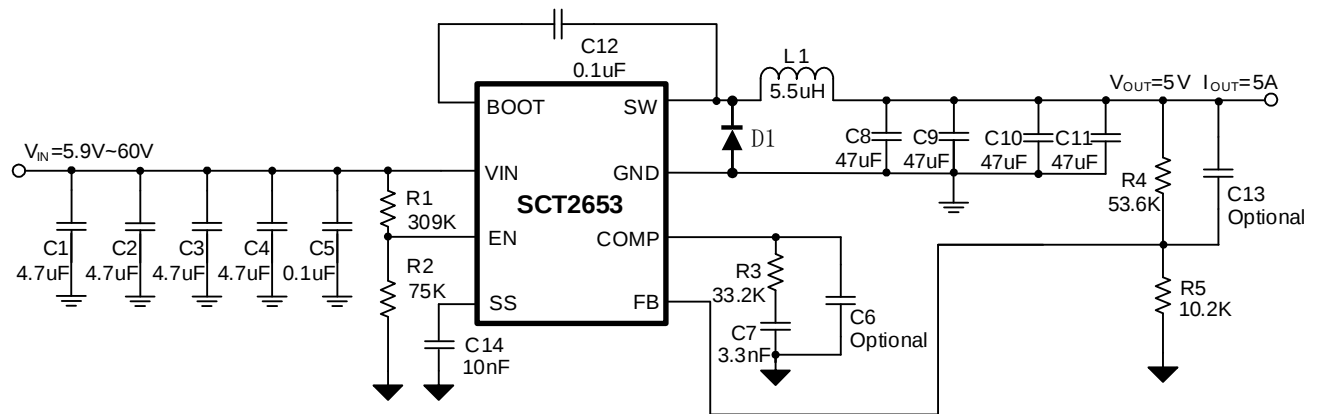
[illegible]

Table 1. R₄, R₅ Value for Common Output Voltage
(Room Temperature)

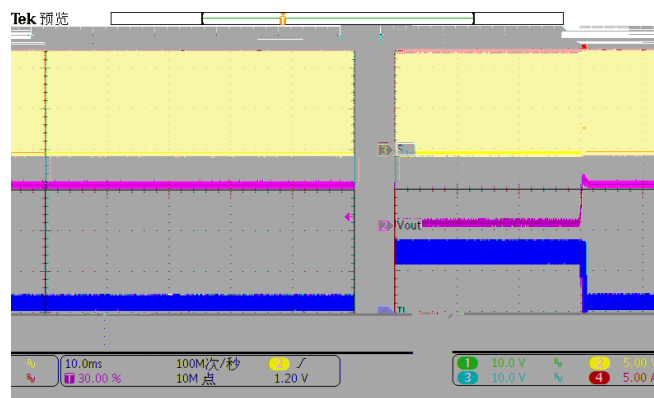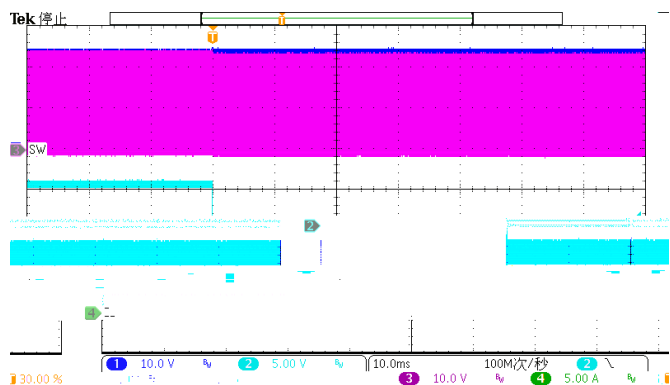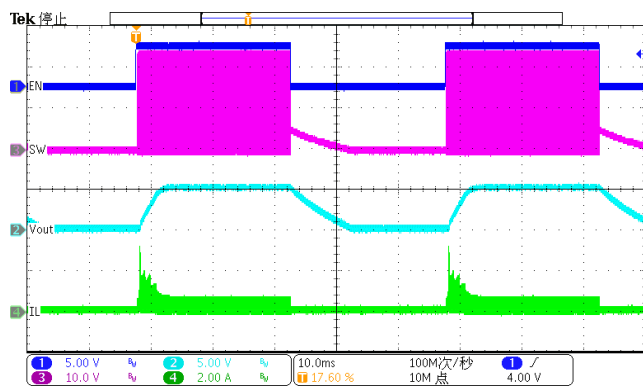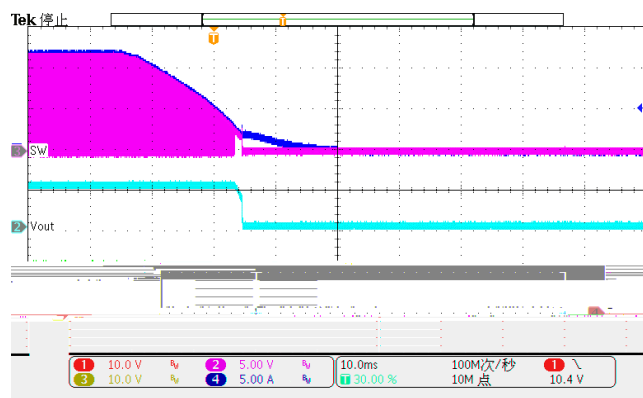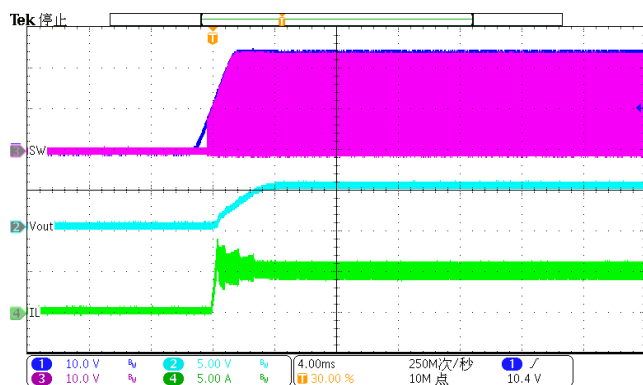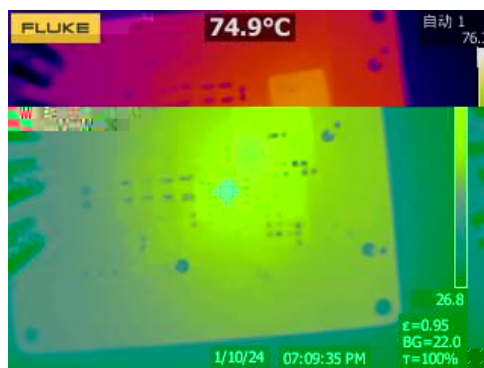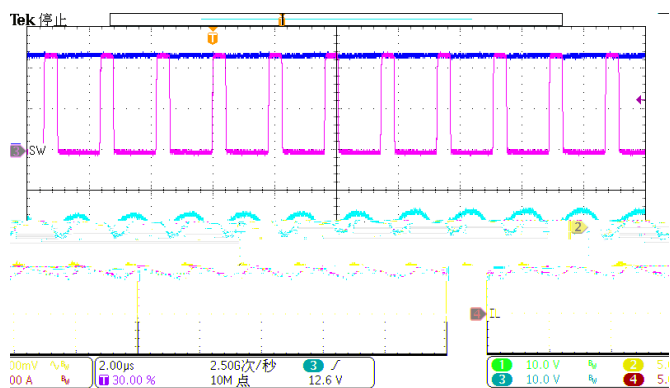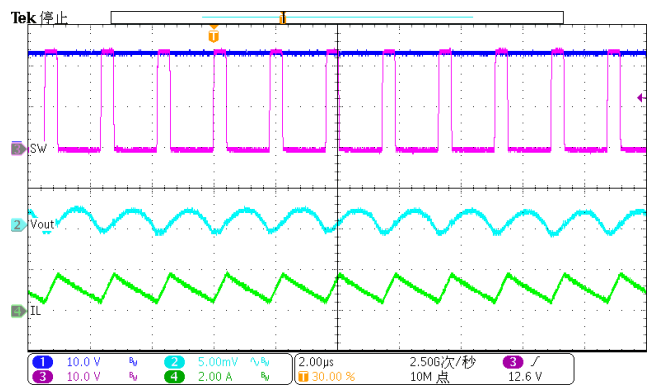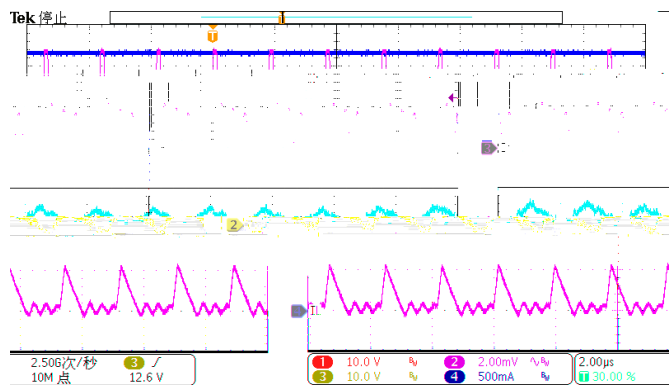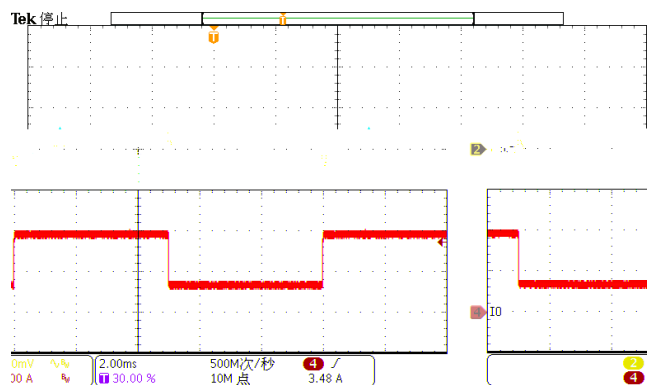

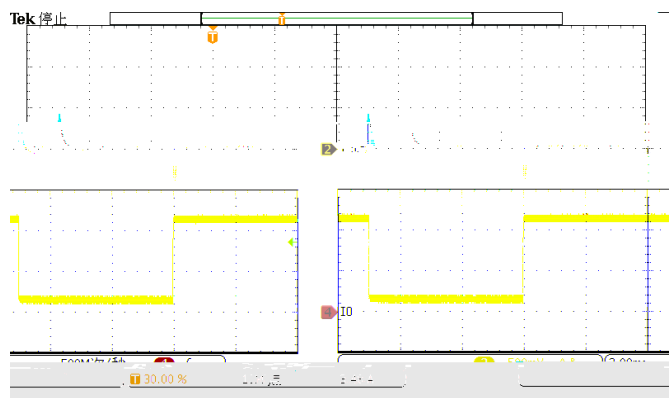

1.

2.

3.

4.


5.

6.


7.

8.

9.

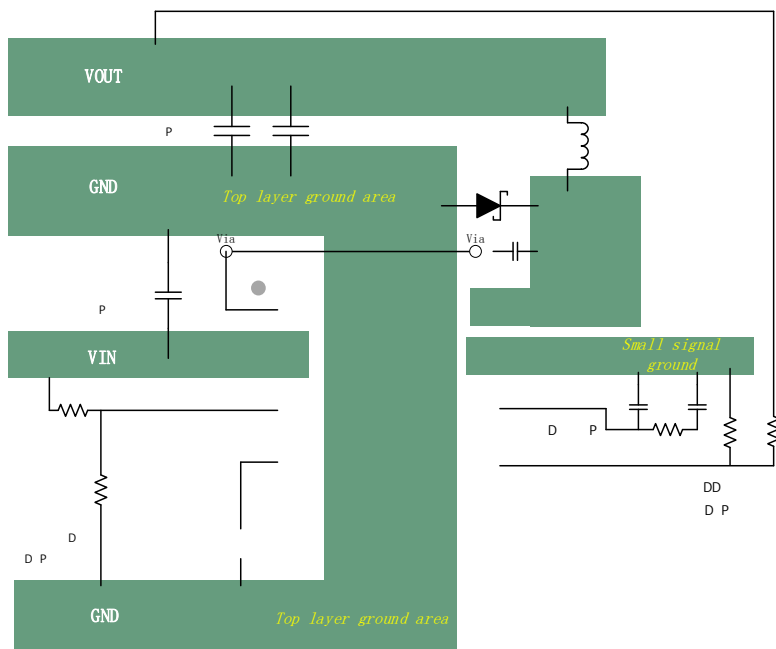

PACKAGE INFORMATION

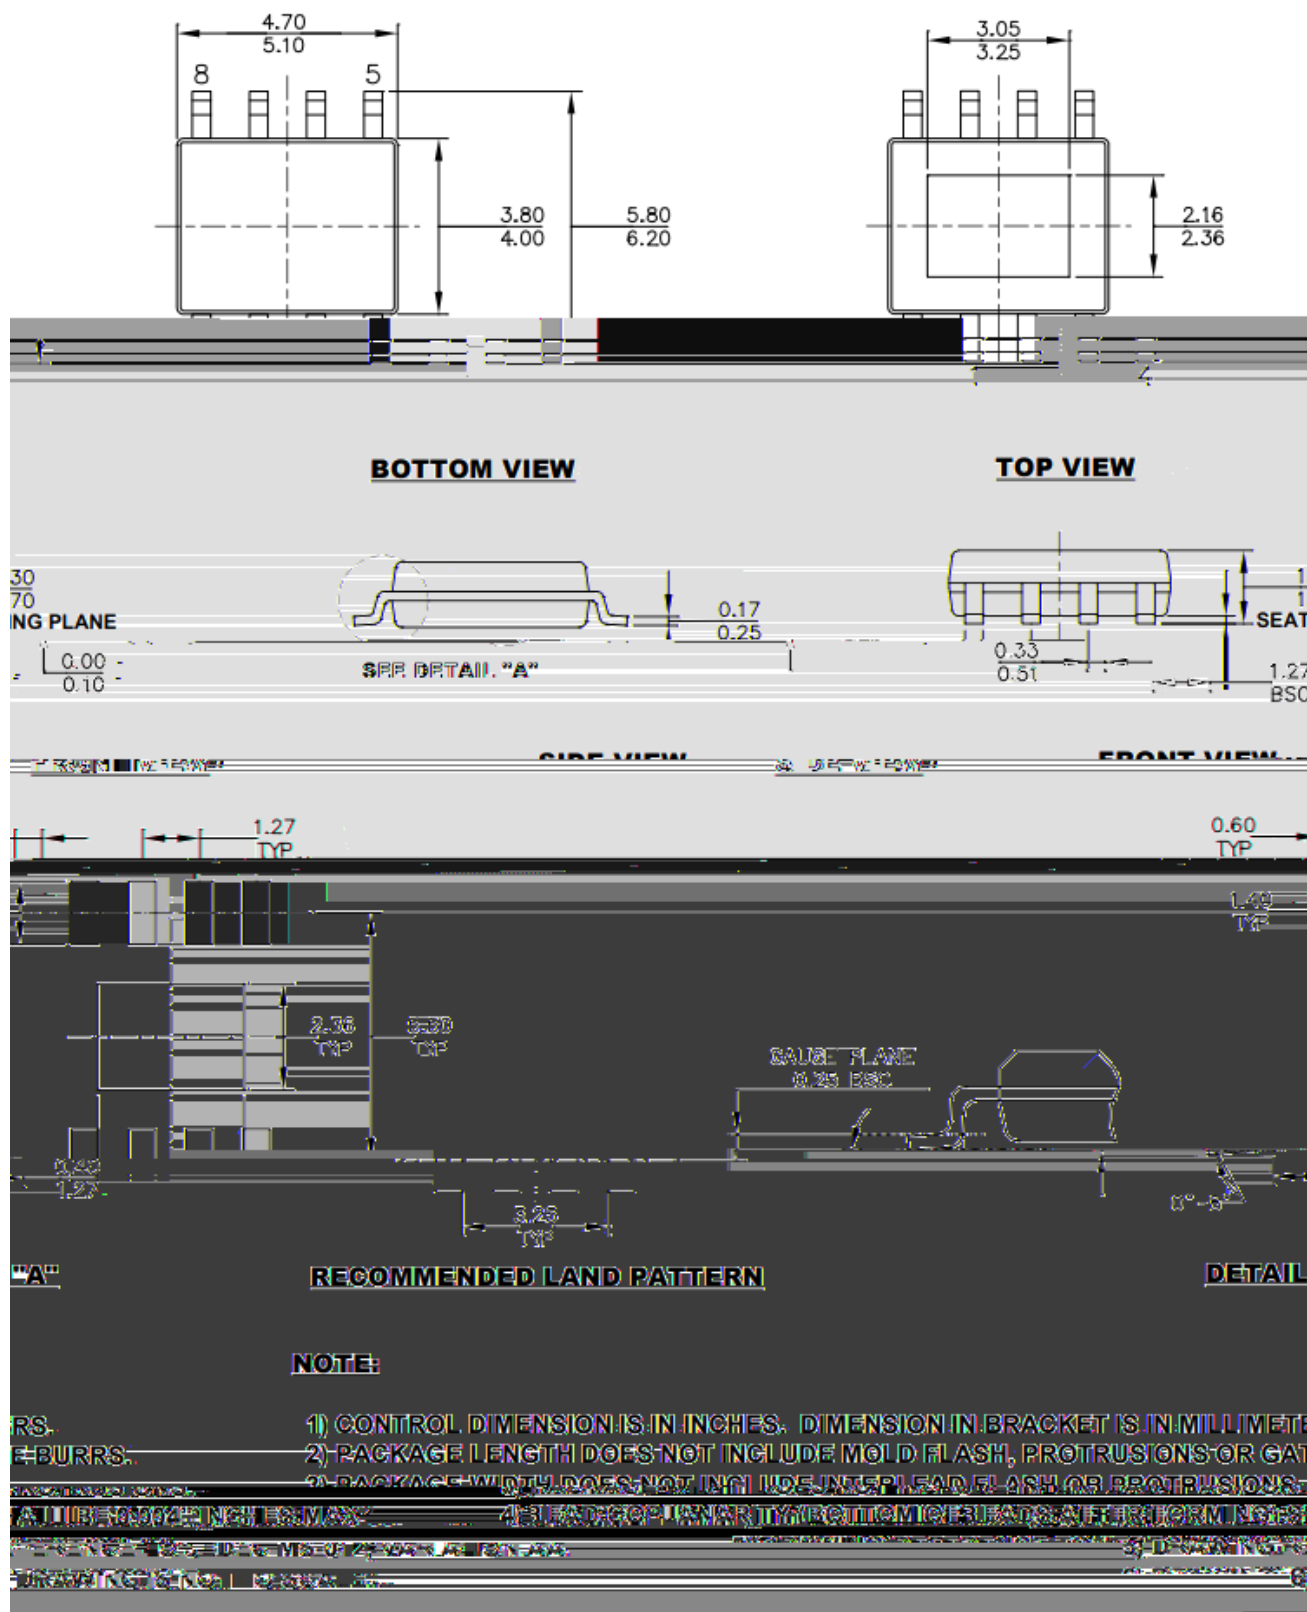

TAPE AND REEL INFORMATION

